


VSBC16R / VHS16R


PN16 Thread Static Balancing Valves

安装说明 INSTALLATION INSTRUCTIONS


1.

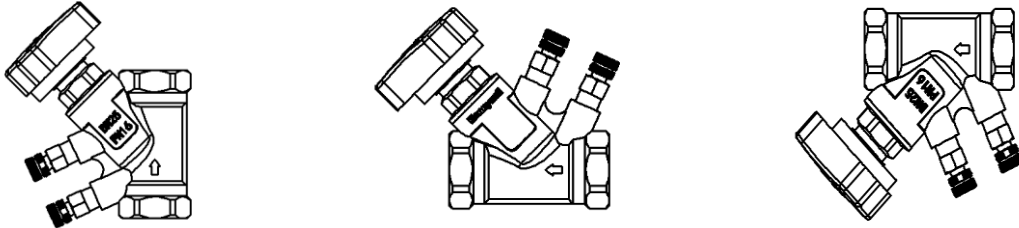


2.

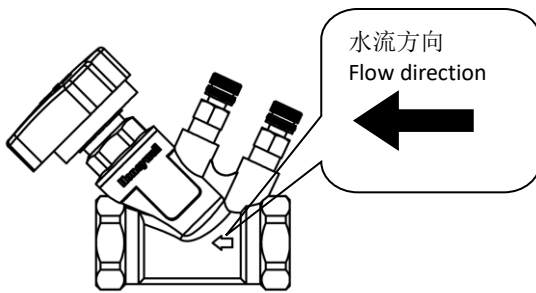


3.

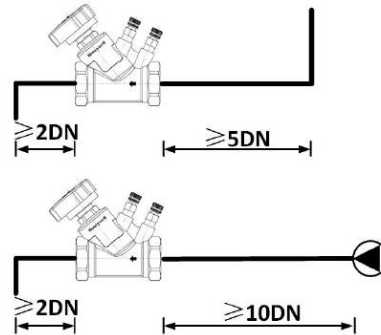


4.



关闭位置
Off position



预设位置
Presetting position
图示预设位置为3.2
The current shown presetting value is 3.2.



锁定位置
Lock position
锁定位置为3.2
The locked presetting value is 3.2.

请用3mm六角扳手锁定预设位置
lock the preset position with 3mm Hex wrench

5. 外形尺寸 Dimensions

DN	D	L mm	H mm	Weight kg
DN15	Rp1/2"	80	87.5	0.677
DN20	Rp3/4"	80	87.5	0.691
DN25	Rp1"	89	90	0.815
DN32	Rp1-1/4"	105	100	1.108
DN40	Rp1-1/2"	120	107	1.494
DN50	Rp2"	140	117	2.25

