
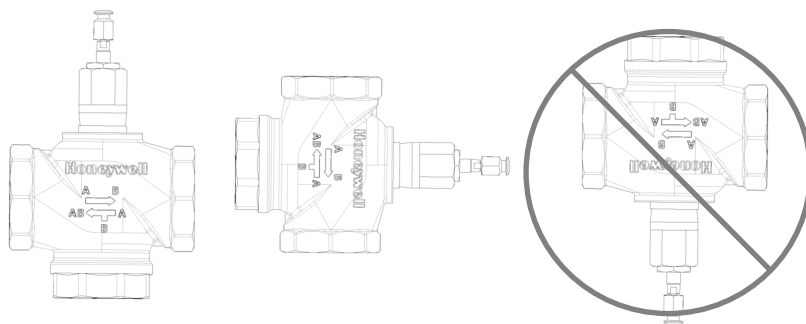


Honeywell

螺纹连接线性阀门

Thread Linear Valve

V5011B3 安装说明书 / Installation Instructions

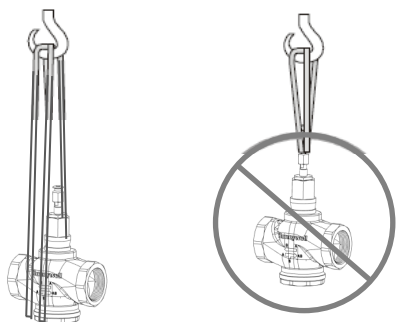

A1管道安装 / Installation




V5011B3W...介质温度: -15~130℃。
V5011B3W...Medium Temp.:
-15~130℃.



在现场管路压力测试及管路冲洗时，阀门应处于全开状态。


Please keep the valve at fully open position in pressure testing or pipe-line flushing mode.

A2

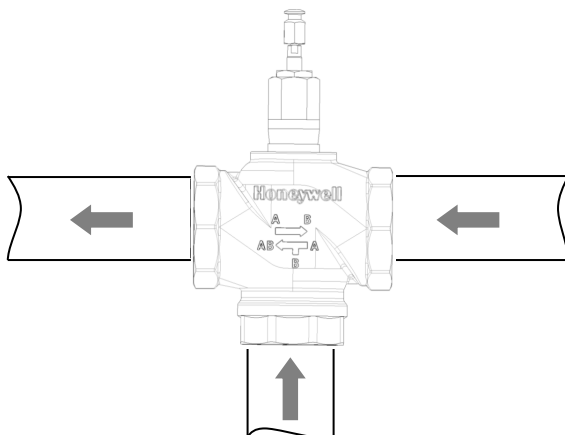

A3 尺寸图 / Dimensions (mm)

阀门口径 DN Size	A	B	C	Y1 A-B关闭 A-B close	Y1 A-AB关闭 A-AB close	重量 Weight Kg
DN15	83	38	49	87.5	107	0.96
DN20	83	37	49	87.5	107	0.96
DN25	103	39	58	87.5	107	1.33
DN32	106	40	62	87.5	107.5	1.66
DN40	120	44	66	87.5	108	2.06
DN50	134	49	71	87.5	108	2.87

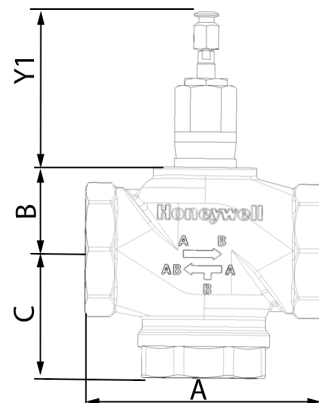

产品型号 / Product OS#

产品型号 SKU	阀门口径 DN Size	介质 Medium	PN	行程Stroke mm	连接方式 Connect	Kvs m³/h
V5011B3W015	DN15	水 Water	16	20	内螺纹 Female thread	4
V5011B3W020	DN20	水 Water	16	20	内螺纹 Female thread	6.3
V5011B3W025	DN25	水 Water	16	20	内螺纹 Female thread	10
V5011B3W032	DN32	水 Water	16	20	内螺纹 Female thread	16
V5011B3W040	DN40	水 Water	16	20	内螺纹 Female thread	25
V5011B3W050	DN50	水 Water	16	20	内螺纹 Female thread	40

执行器选项与关断压差 / Actuators Selection & Close-off Pressure (kPa)

阀门规格 Valve	执行器规格与关断压差 Actuators Selection & Close-off Pressure (kPa)	
型号 SKU	600N	1800N
	ML6420A3007-E ML7420A8088-E ML8824A0620 ML7425A8018-E	ML7421A8035-E ML8824A1820
V5011B3W015	1100	1600
V5011B3W020	1100	1600
V5011B3W025	800	1600
V5011B3W032	550	1600
V5011B3W040	350	950
V5011B3W050	220	630

霍尼韦尔环境自控产品（天津）有限公司
地址：天津经济技术开发区南海路158号
Honeywell Environmental And Combustion Controls (Tianjin) Co., Ltd
No.158,NanHai Road,TEDA,Tianjin,P.R.C.300457