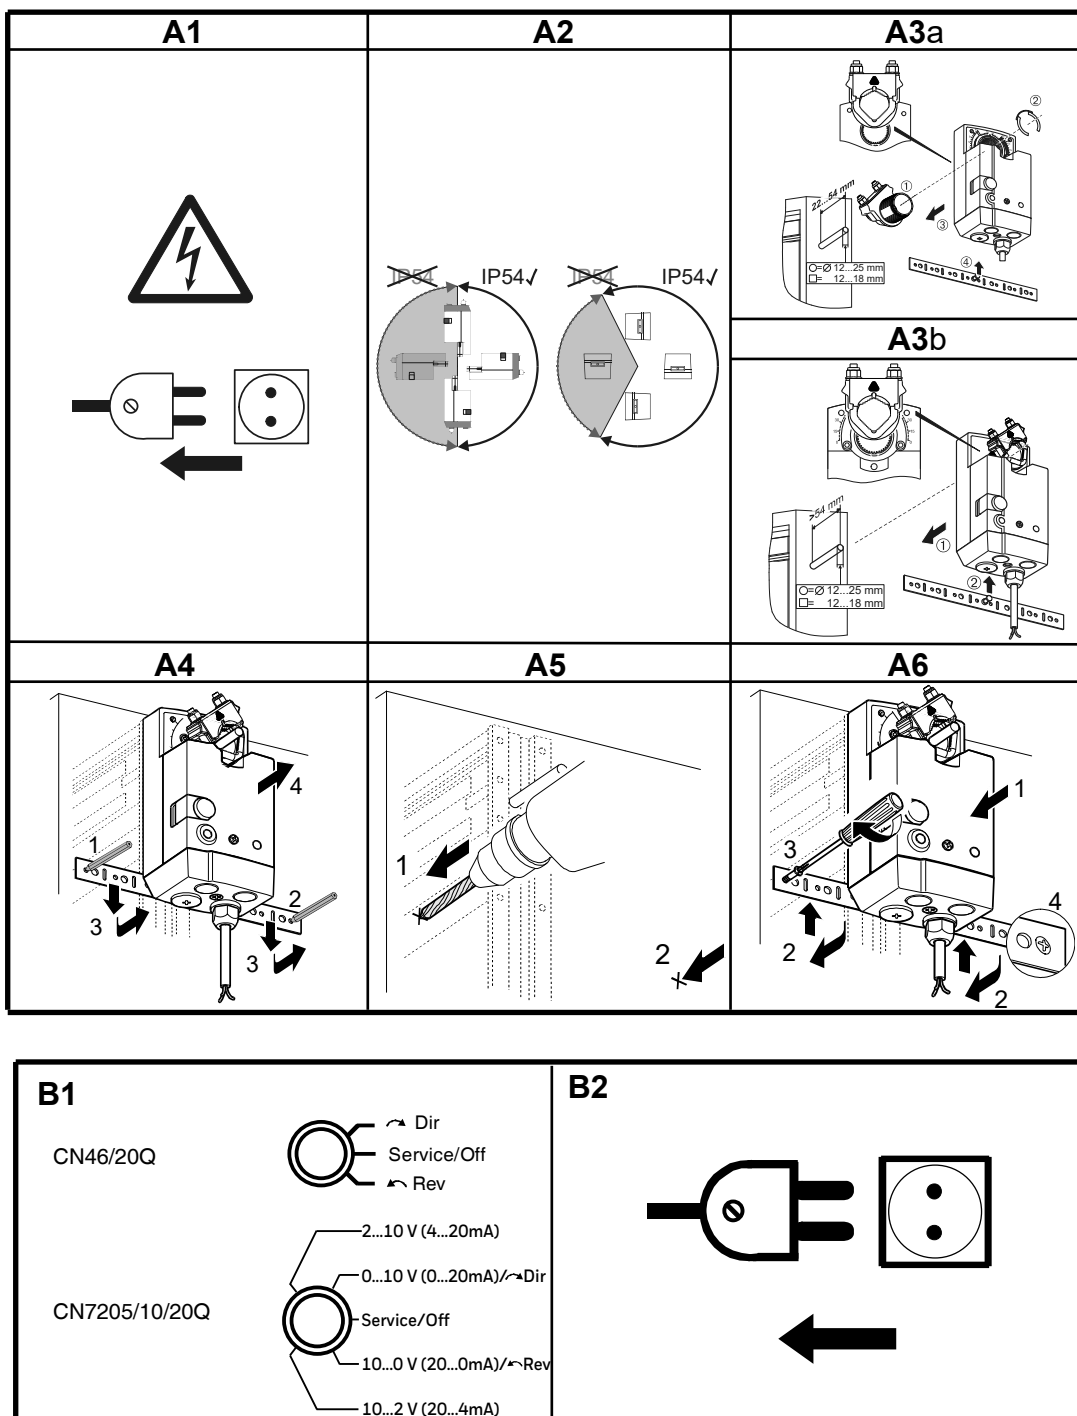





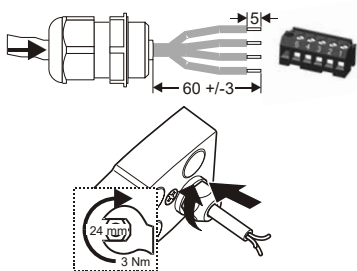

CN46XXQ, CN72XXQ SERIES

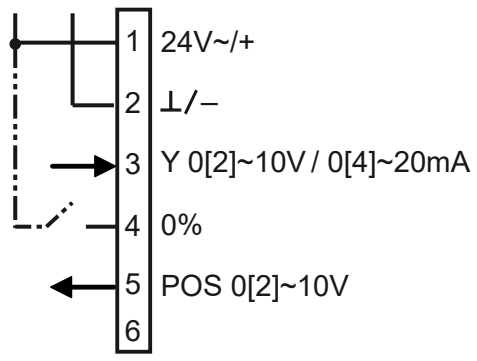
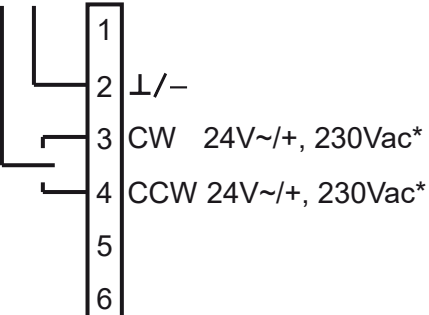
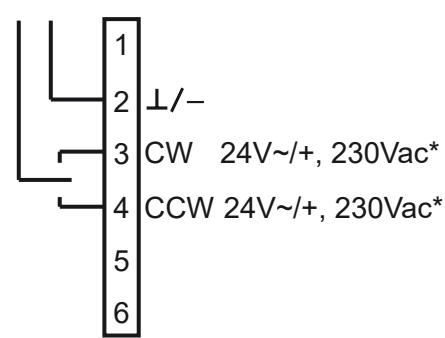

NON-SPRING RETURN HIGH SPEED DAMPER ACTUATORS

INSTALLATION INSTRUCTION

The device shall be installed in locked space in field, operated by authorized technician.
Disconnect power before installation



C1  	C2 	C3 CN7205/10/20Q  Switch 1: Voltage Control (Default) Switch 2: Signal Loss Position Hold (Default)
C4 CN7205/10/20Q O(2)...10V ON OFF (DEFAULT)  1. Voltage Control (OFF) 2. Signal Loss Position Hold (ON) O(4)...20mA ON OFF (DEFAULT)  1. Current Control (ON) 2. Signal Loss Position Hold (OFF)	C5 Terminal connection only 	C6 Terminal connection only 

D1 CN72XXQ MODULATING  ----- = override option	D2 CN46XXQ, CN72XXQ FLOATING 
D3 CN46XXQ 2-POS 	D4 FEEDBACK SWITCHES (SW2-CN) 

* 230Vac for CN46XXQ only.

Name and Content of Hazardous Substances

部件名称 Component Name	有害物质 Hazardous Substances					
	铅(Pb)	汞(Hg)	镉(Cd)	六价铬 (Cr6+)	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
电路板组件 PWBA	X	O	O	O	O	O
电机 Motor	X	O	O	O	O	O
本表格依据 SJ/T 11364 的规定编制。 This table is prepared in accordance with the provisions of SJ/T 11364.						
O: 表示该有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。 Indicates that said hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement of GB/T 26572.						
X: 表示该有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。 Indicates that said hazardous substance contained in all of the homogeneous materials for this part is above the limit requirement of GB/T 26572.						

未列入表内的其他部件，皆不含任何超出限量要求的限制使用物质。

All other components, not listed in the table, do not contain restricted substances above the threshold level.



Honeywell Environmental and Combustion Controls (Tianjin) Co., Ltd
No.158,NanHai Road,TEDA,Tianjin,P.R.C.300457

©2022 Honeywell International Inc. All rights reserved.

The information contained herein is subject to change without notice.

3011-5170-001 Rev.A