
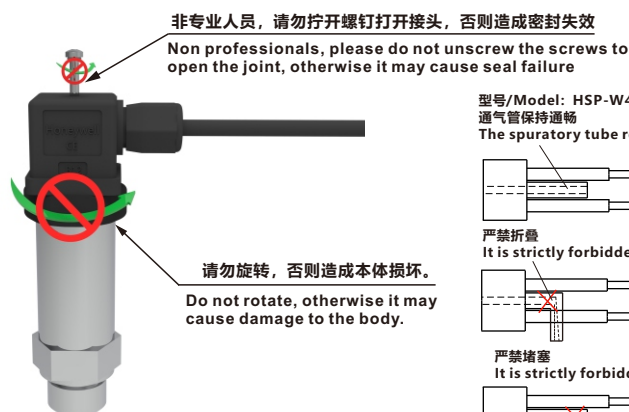


Honeywell


# Liquid Pressure Transmitter

## 说明书 / Instructions

### 产品尺寸和安装 / Dimensions and Installation

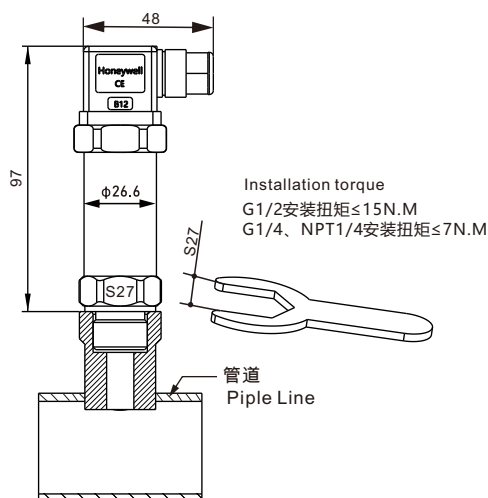


型号/Model: HSP-W401MC、HSP-W401VC  
通气管保持通畅  
The spurious tube remains open



严禁折叠  
It is strictly forbidden to fold




严禁堵塞  
It is strictly forbidden to block



### 出线方式 / Wiring Mode

4-20mA输出 / 4-20mA Output

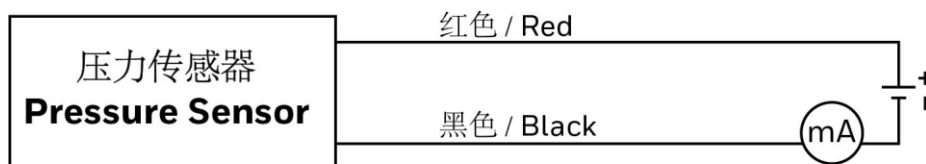

0-10V输出 / 0-10V Output



### 注意事项 / Precautions

- 如果导气孔堵塞，禁止使用尖锐物体疏通气孔，请及时联系维修服务人员。  
If the air hole is blocked, it is forbidden to use a sharp object for clear. Please contact the maintenance and service personnel.
- 建议主要使用于空调水。如果检测介质为粘稠液体，请与我们确认以满足您的应用要求。  
It is suggested to mainly use the transmitter for the air-conditioner water. If you need a transmitter for viscous liquids, please confirm with us to meet your requirements.
- 使用时确保管道无泥砂等杂质  
Ensure that the pipeline is free of sediment and other impurities during use
- 型号：HSP-W401MC、HSP-W401VC，量程：0~1Bar (0.25%F.S)，使用带有通气管线束，接线时保证气管孔畅通。

Model: HSP-W401MC, HSP-W401VC, range: 0~1Bar (0.25%F.S), use a wiring harness with ventilation pipeline, and ensure that the trachea hole is unobstructed when wiring.