

Chlorine Dioxide

Sensoric ClO₂ 3E 1 O (unfiltered)

Product Data Sheet

Sensoric ClO₂ 3E 1 O

FEATURES

Amperometric 3 electrode sensor cell
Low susceptibility to abrupt changes of humidity
Interference to Chlorine
High selectivity
0 voltage biased operation

TYPICAL APPLICATIONS

Pulp & Paper Industry, Water treatment plants, Desinfection
Portable and fixed point monitoring of TLV levels

PART NUMBER INFORMATION

| | |
|-------------------------|----------------|
| MINI | 2731-331-30009 |
| SENSORIC CLASSIC | 2731-331-30069 |
| CTL 4 series adaptation | 2731-331-30049 |
| CTL 7 series adaptation | 2731-331-30079 |

Note:

It is recommended to cross calibrate with 1 –5 ppm chlorine

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

Product Data Sheet

Sensoric ClO₂ 3E 1 O

TECHNICAL SPECIFICATIONS


| | |
|-----------------------------|-------------------------------------------------------------|
| Measuring Range | 0–1 ppm |
| Sensitivity Range | 600 nA/ppm ± 200 nA/ppm (negative signal) |
| Zero Current at 20 °C | < ± 15 nA |
| Resolution at 20 °C | < 0.03 ppm |
| Bias Potential | 0 mV |
| Linearity | < 10% full scale |
| Response Time at 20 °C | |
| t ₅₀ | < 20 s calculated from 4 min. exposure time |
| t ₉₀ | < 120 s (typically < 60 s), calculated from 4 min. exposure |
| Long Term Sensitivity Drift | <10% per 6 months |
| Operation Conditions | |
| Temperature Range | -20 °C to +40 °C |
| Humidity Range | 15–90% r.H., non–condensing |
| Effect of Humidity | no effect |
| Sensor Life Expectancy | > 24 months in air |
| Warranty | 12 months |

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

Product Data Sheet

Sensoric ClO₂ 3E 1 O

OUTPUT vs. TEMPERATURE:
(calibration has been done using 1 ppm Cl₂ instead of ClO₂)

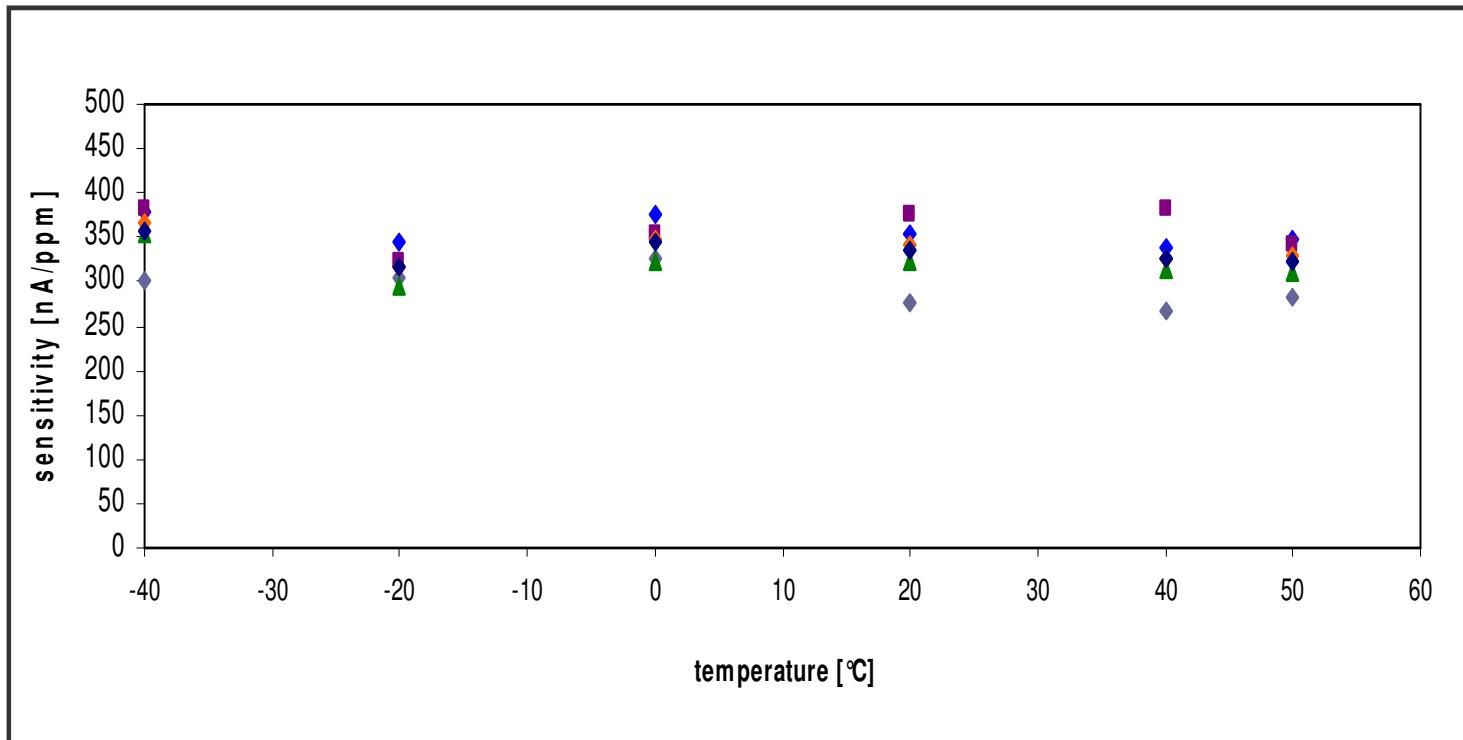


Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Product Data Sheet

Sensoric ClO₂ 3E 1 O

ZERO READING vs. TEMPERATURE:
(calibration has been done using 1 ppm Cl₂ instead of ClO₂)

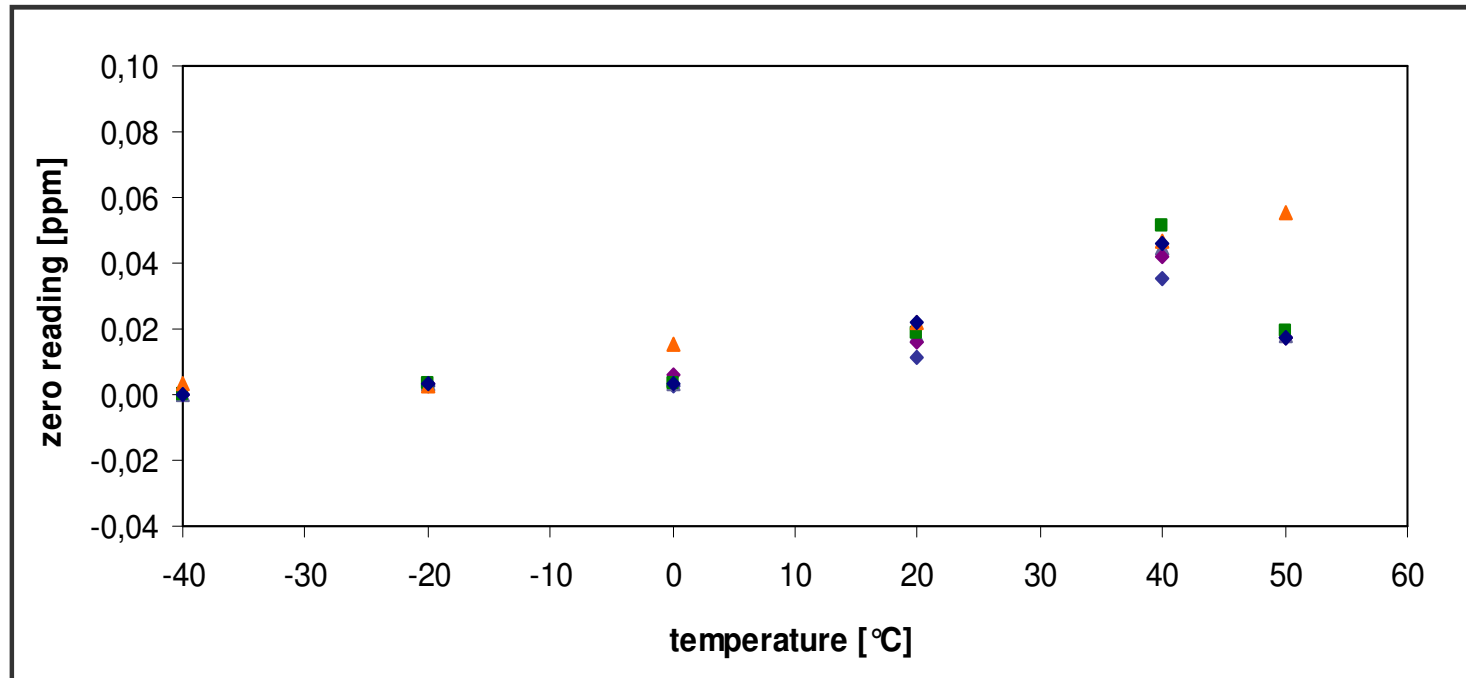

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



Product Data Sheet

Sensoric ClO₂ 3E 1 O

CROSS SENSITIVITIES AT 20 °C

| Gas | Concentration | Reading [ppm] |
|------------------|---------------|---------------|
| Alcohols | 1000 ppm | 0 |
| Carbon Monoxide | 100 ppm | 0 |
| Chlorine | 1 ppm | 0.6 |
| Ozone | 0.25 ppm | 0.7 |
| Hydrogen | 3000 ppm | 0 |
| Hydrogen Sulfide | 20 ppm | -5 |

Notes:

1. Interference factors may differ from sensor to sensor and with life time.
2. This table does not claim to be complete. The sensor might also be sensitive to other gases.
3. It is recommended to use 1 – 5 ppm Cl₂ for cross calibration.

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

Product Data Sheet

Safety Note

This sensor is designed to be used in safety critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardize the safety of people and property.

Attention

Use of the Sensoric range sensors requires complete understanding of the instructions. Before using Sensoric range sensors please carefully read 'Application Notes' which can be found at www.citytech.com under the heading 'Support' -> 'Application Notes' -> 'Sensoric'

Product Safety Data Sheets (PSDS) can be obtained at www.citytech.com under the heading 'Support' -> 'Product Safety Datasheets'

For further assistance on sensor selection and use, please contact a member of the Technical Sales team.

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.